

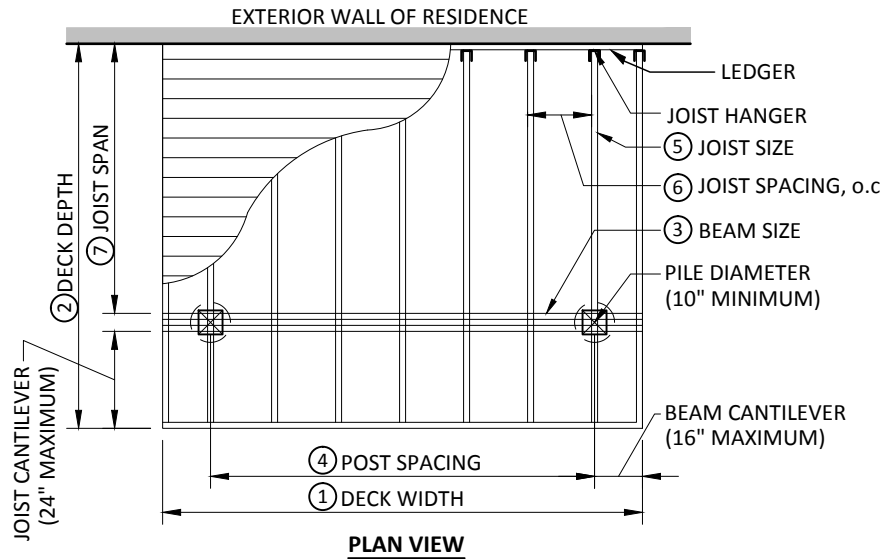


# UNCOVERED DECK APPLICATION DETAIL SHEET

Civic Address: \_\_\_\_\_

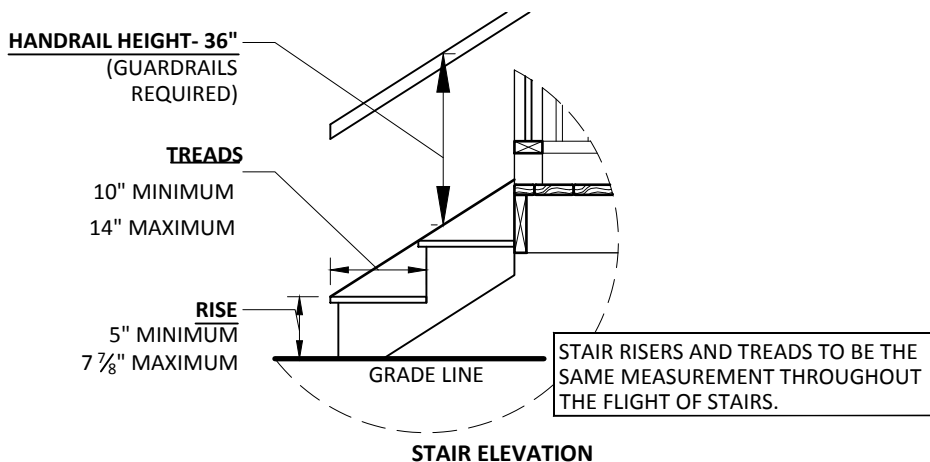

\*ENSURE THAT NO PART OF RAILING ASSEMBLY IS CLIMBABLE

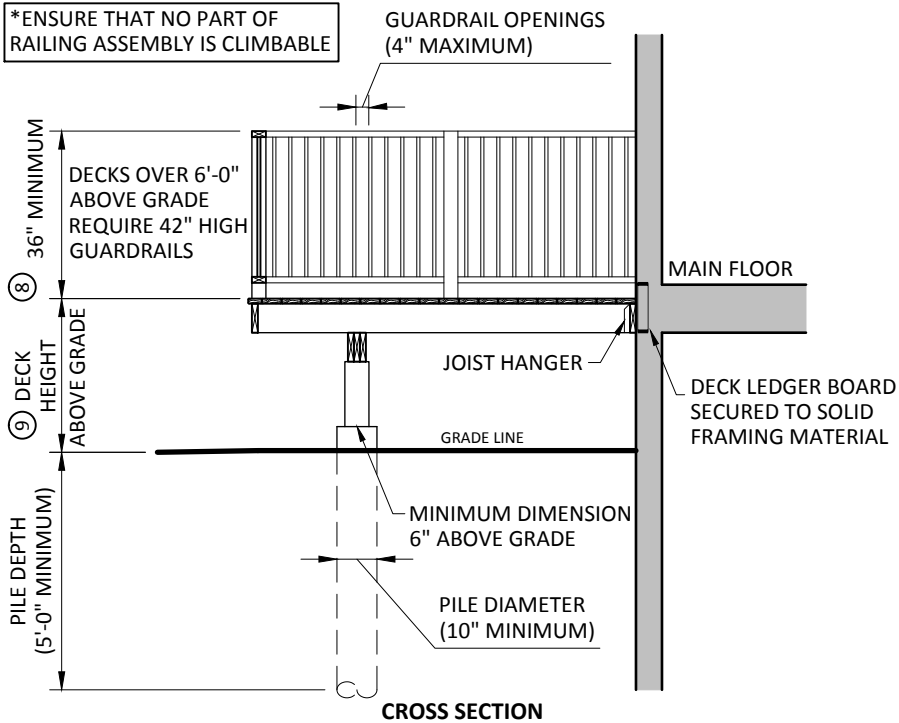

## COMPLETE BELOW:

- ① DECK WIDTH \_\_\_\_\_
- ② DECK DEPTH \_\_\_\_\_
- ③ BEAM SIZE \_\_\_\_\_ PLY 2x \_\_\_\_\_
- ④ POST SPACING \_\_\_\_\_
- ⑤ JOIST SIZE \_\_\_\_\_
- ⑥ JOIST SPACING \_\_\_\_\_ O.C.
- ⑦ JOIST SPAN \_\_\_\_\_
- ⑧ RAILING HEIGHT \_\_\_\_\_
- ⑨ DECK HEIGHT ABOVE GRADE \_\_\_\_\_

## \*NOTE:

1. DECKS TO BE INSPECTED AFTER STAIRS, GUARDS AND RAILINGS ARE COMPLETED. PROVIDE ACCESS TO THE UNDERSIDE OF THE DECK.
2. IF A ROOF OR OTHER STRUCTURE WILL BE CONSTRUCTED OVER THE DECK, AN APPROVED PERMANENT FOUNDATION IS REQUIRED. DETAILS MUST BE SUBMITTED FOR REVIEW.
3. SKETCHES SUPPLIED ON THIS PAGE ARE FOR CLARIFICATION PURPOSES.

## MAXIMUM FRAMING SPAN

| JOIST SIZE   | 16" o.c.   | 24" o.c.  |
|--------------|------------|-----------|
| 2 x 6        | 9'-0"      | 7'-9"     |
| 2 x 8        | 11'-6"     | 9'-6"     |
| 2 x 10       | 14'-0"     | 11'-6"    |
| Post Spacing | Joist Span | Beam Size |
| 6'-0"        | 8'-0"      | 2 - 2x 6  |
|              | 9'-0"      | 2 - 2x 6  |
|              | 10'-0"     | 2 - 2x 8  |
|              | 11'-0"     | 2 - 2x 6  |
|              | 12'-0"     | 2 - 2x 6  |
| 8'-0"        | 14'-0"     | 2 - 2x 8  |
|              | 8'-0"      | 2 - 2x 8  |
|              | 9'-0"      | 2 - 2x 8  |
|              | 10'-0"     | 2 - 2x 8  |
|              | 11'-0"     | 2 - 2x 8  |
| 10'-0"       | 12'-0"     | 2 - 2x 10 |
|              | 14'-0"     | 2 - 2x 10 |
|              | 8'-0"      | 3 - 2x 8  |
|              | 9'-0"      | 3 - 2x 10 |
|              | 10'-0"     | 3 - 2x 10 |
|              | 11'-0"     | 3 - 2x 10 |
|              | 12'-0"     | 3 - 2x 10 |
|              | 14'-0"     | 3 - 2x 10 |