


# Project Overview – Site Concept

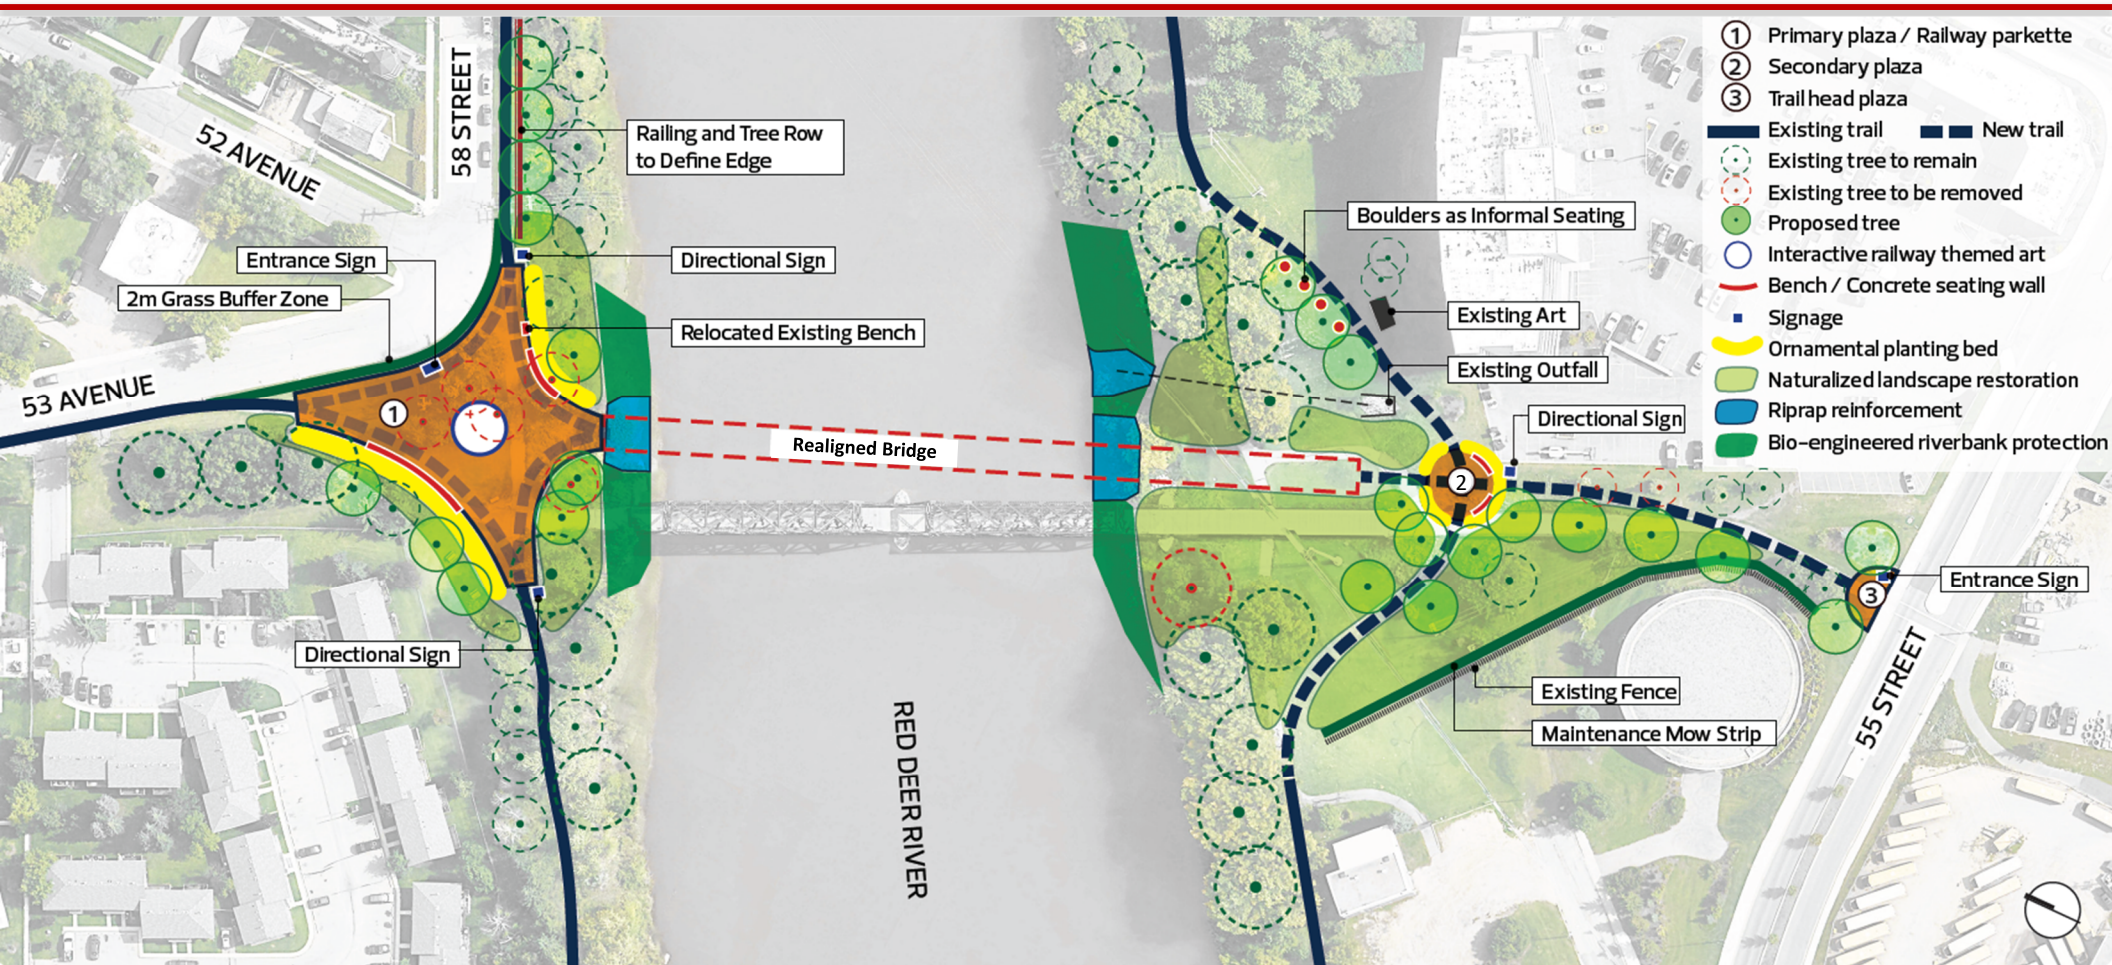

To reduce risk of damage to the trusses and improve pathway connections, the bridge is being realigned downstream approximately 15 meters. A new foundation will be constructed beside the existing and the trusses lifted and placed by large cranes onto the new supports.